

Features

- ★ Using Hi-quality,Hi-brightness LED as lighting source,high efficiency and energy-saving, free from glare and flicker, and has average luminous surface.
- ★ Aluminum heat-sink base and No Glare
- ★ Long-lifespan on average over 50 thousand hours is more than 10 times of traditional lamps.
- ★ Adopting lampshade materials with more than 90% light transmittance, and aluminum alloy of high thermal conduction as lamp shell.
- ★ Wide range of input voltage:AC200-240V.
- ★ New high efficiency constant current driver.
- ★ Instant start,no flickering,no humming.
- ★ Special circuit design,four sides into the light,resorted to light more efficiently and evenly.
- ★ No electrical wave, conforming to CE.
- ★ Green environmental protection,lead-free material,conforming to ROHS.
- ★ No RF interference.
- ★ Decrease the maintenance fee,can be used for a long time without changing for new one.

Applications:


- ★ Hotels
- ★ Factories&Offices
- ★ Commercial Purposes
- ★ Residential/Institution Buildings
- ★ Schools, Colleges&Universities
- ★ Hospitals
- ★ Othe Lighting

Electrical/Optical Characteristics/Specifications


MODEL:SRPL30X120-36WH-BL-UGR19

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.3A	DC36V	0.90A	36W	≥0.95
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K
			Luminous efficiency	105LM/W	110LM/W
SMD2835	48PCS	≥80Ra	Luminous flux	3780LM	3960LM
			Beam Angle	90°	
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W
50.000Hours	CE,RoHS	IP41	ClassIII	295*1195*35MM	1.9Kg
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W
-20°C to +50°C	-30°C to +60°C	10-80%RH	10-90%RH	L1245*W95*H345MM	4.1Kg
Outer carton package	4*2layer=8PCS/carton,K=K corrugated paper, L1265*W405*H370mm, GW:18KG				
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming				

Dimensions

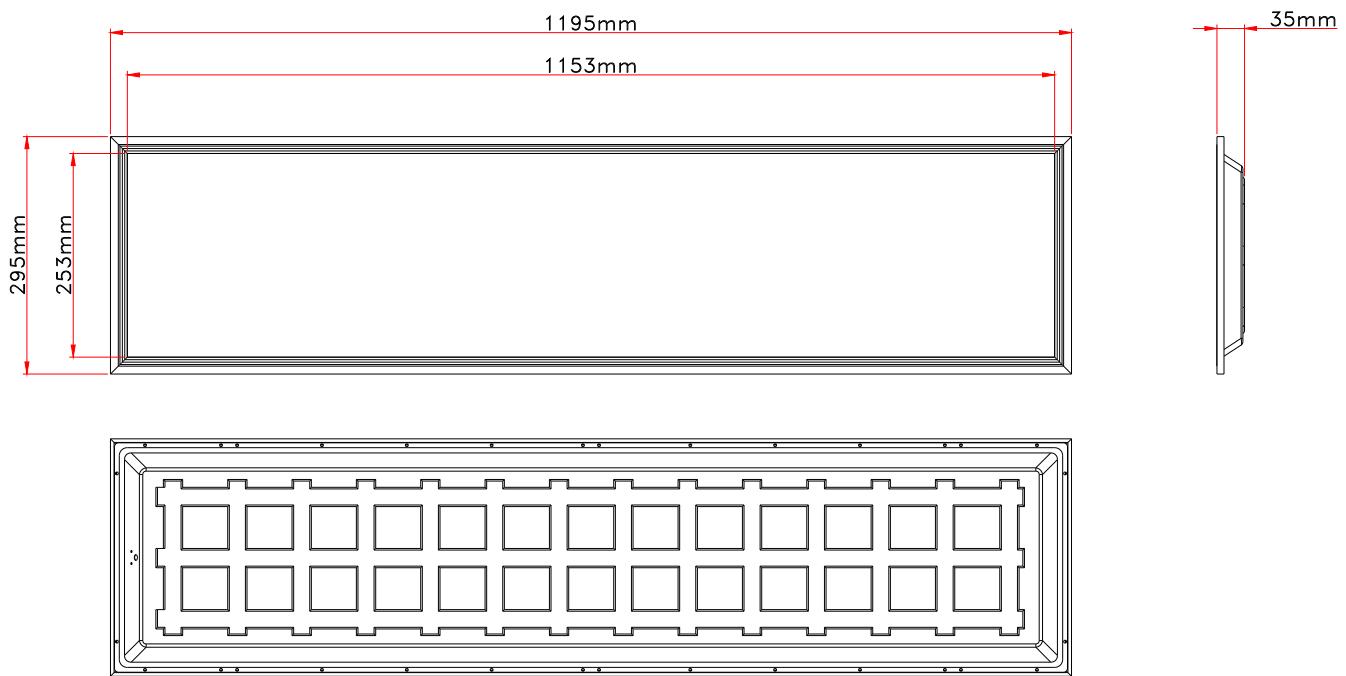

Photo

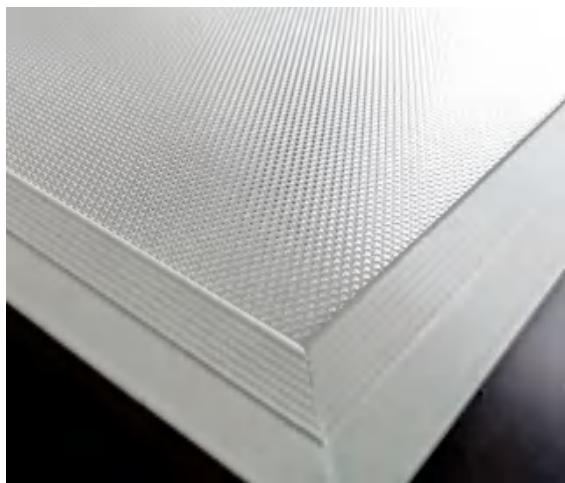


Test report

SRPL30X120-36WH-BL-UGR19

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.6V I:0.1643A P:35.02W PF:0.9618 Lamp Flux:3679.83x1 lm		
NAME: LED Panel Light	TYPE:4000K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: TSONG	SUR.:1.158x0.258	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA			Eff: 105.09 lm/W
MODEL		I _{max} (cd)	1685	S/MH(C0/180)	1.28
NOMINAL POWER (W)	36	LOR (%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE (V)	222	TOTAL FLUX(lm)	3679.8	η UP,DN(C0-180)	0.0,51.0
NOMINAL FLUX(lm)	3679.83	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	221.5	η down (%)	100.0	CIBSE SHR MAX	1.35

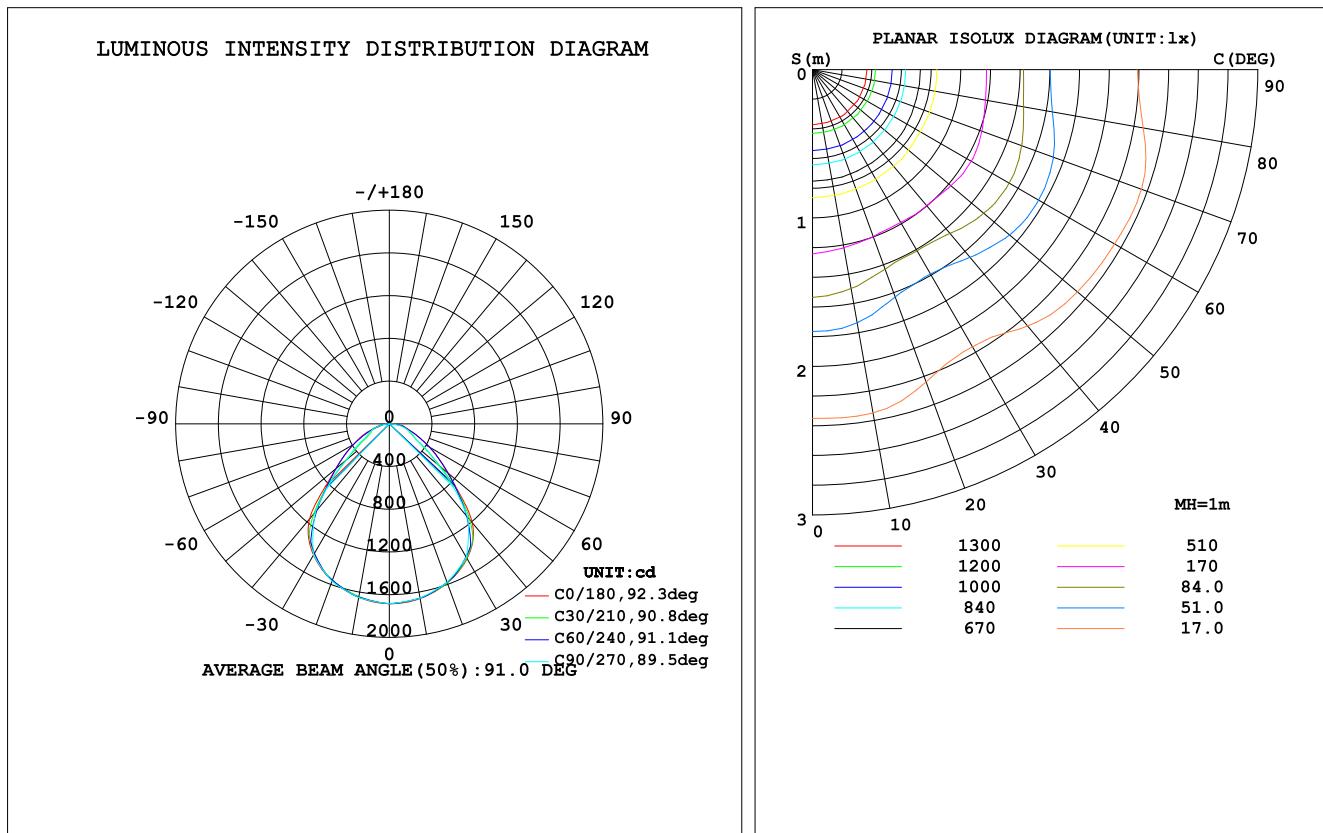

Test report

SRPL30X120-36WH-BL-UGR19

Uncorrected UGR Table


Test: U:221.6V I:0.1643A P:35.02W PF:0.9618 Lamp Flux:3679.83x1 lm											
NAME: LED Panel Light			TYPE: 4000K			WEIGHT:					
DIM.:			SPEC.:			SERIAL No.:					
MFR.: TSONG			SUR.: 1.158x0.258			PROTECTION ANGLE:					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	16.1	17.5	16.4	17.7	17.9	16.2	17.5	16.4	17.7	17.9	
	3H	17.2	18.4	17.4	18.6	18.9	17.1	18.3	17.4	18.6	18.8
	4H	17.7	18.9	18.0	19.2	19.4	17.5	18.7	17.8	19.0	19.2
	6H	18.3	19.4	18.6	19.7	20.0	18.0	19.1	18.3	19.4	19.6
	8H	18.6	19.7	18.9	20.0	20.2	18.1	19.2	18.4	19.4	19.7
	12H	18.8	19.9	19.2	20.2	20.5	18.1	19.1	18.4	19.4	19.7
4H	2H	16.4	17.6	16.7	17.9	18.1	16.5	17.7	16.8	17.9	18.2
	3H	17.6	18.7	18.0	19.0	19.3	17.7	18.7	18.0	19.0	19.3
	4H	18.4	19.3	18.7	19.6	19.9	18.3	19.3	18.7	19.6	19.9
	6H	19.1	20.0	19.5	20.3	20.7	19.0	19.8	19.4	20.2	20.5
	8H	19.5	20.3	19.9	20.6	21.0	19.2	19.9	19.6	20.3	20.7
	12H	19.8	20.5	20.2	20.9	21.3	19.1	19.9	19.6	20.2	20.6
8H	4H	18.6	19.4	19.0	19.8	20.1	18.6	19.4	19.0	19.7	20.1
	6H	19.5	20.2	20.0	20.6	21.0	19.5	20.1	19.9	20.5	20.9
	8H	20.0	20.5	20.4	21.0	21.4	19.7	20.3	20.2	20.7	21.2
	12H	20.4	20.9	20.9	21.3	21.8	19.7	20.2	20.2	20.7	21.1
12H	4H	18.6	19.4	19.1	19.7	20.1	18.6	19.3	19.0	19.7	20.1
	6H	19.6	20.2	20.1	20.6	21.0	19.6	20.1	20.0	20.6	21.0
	8H	20.1	20.6	20.6	21.0	21.5	19.9	20.3	20.3	20.8	21.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.4 / - 0.4				+ 0.3 / - 0.4						
1.5H	+ 0.2 / - 0.3				+ 0.2 / - 0.6						
2.0H	+ 0.7 / - 0.7				+ 0.5 / - 1.2						

CIE Pub.117 Corrected 3680 lm Total Lamp Luminous Flux. ($8\log(F/F_0) = 4.5$)

Test report

SRPL30X120-36WH-BL-UGR19

Flux out:2491 lm

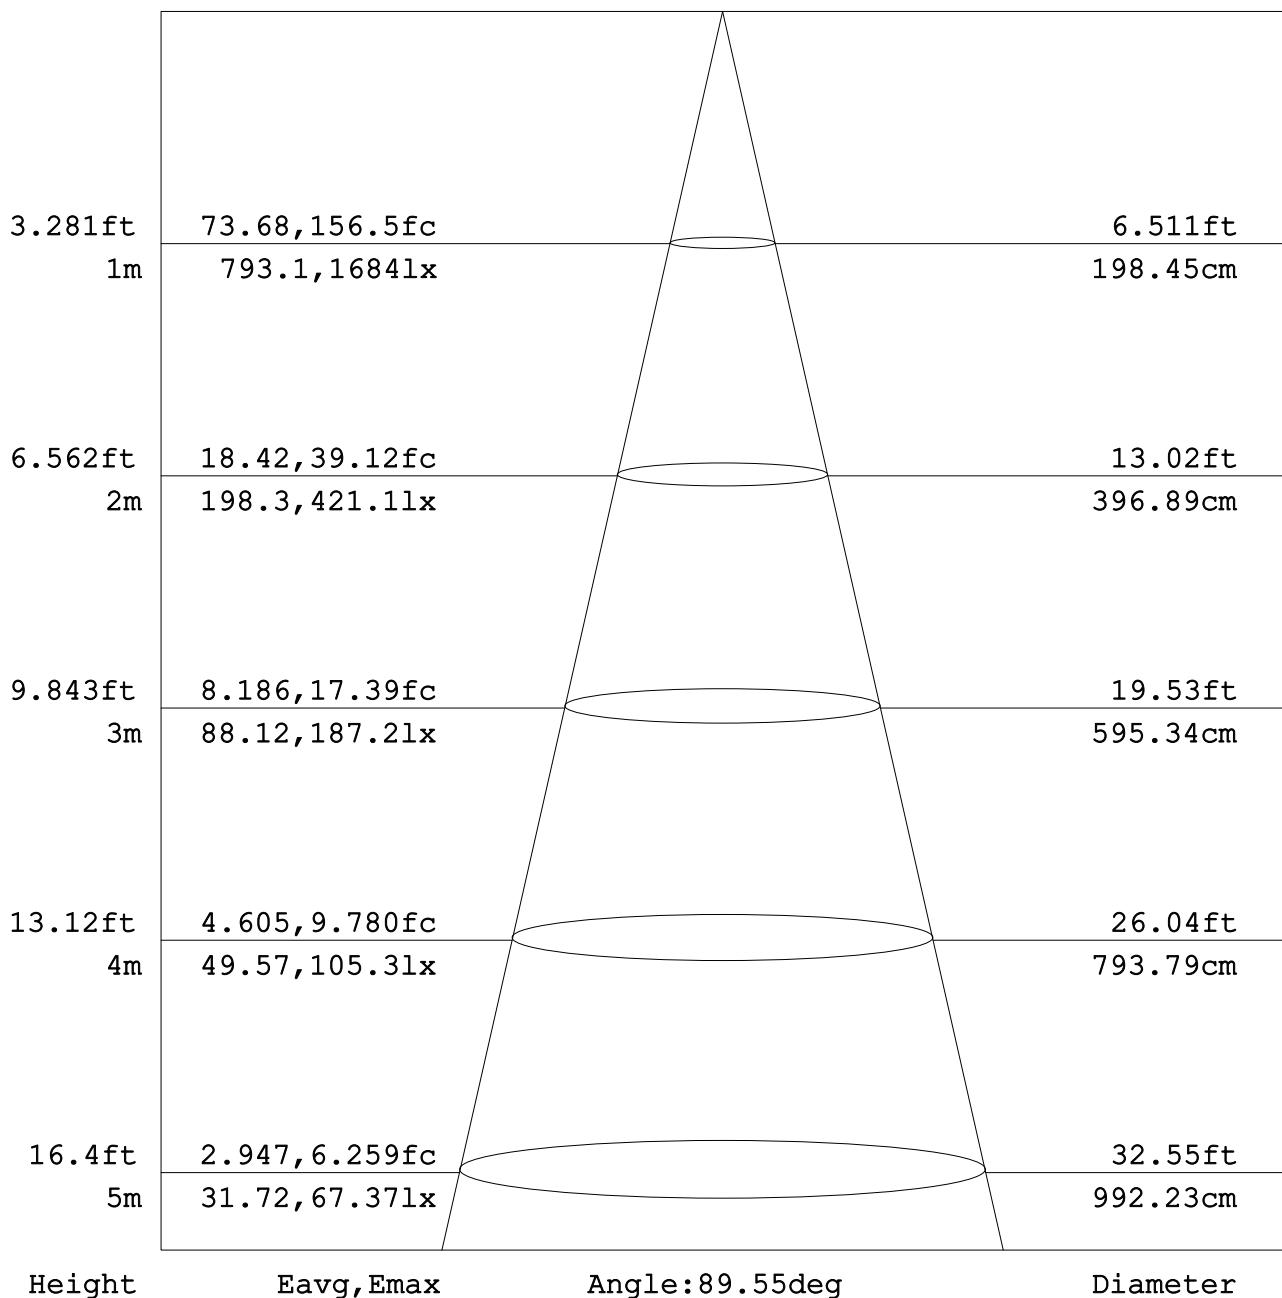


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Installation Instruction

1. In-built

①

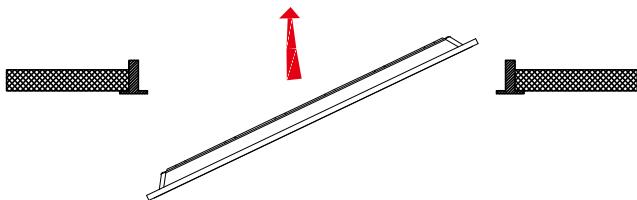


②




2. Suspending

①

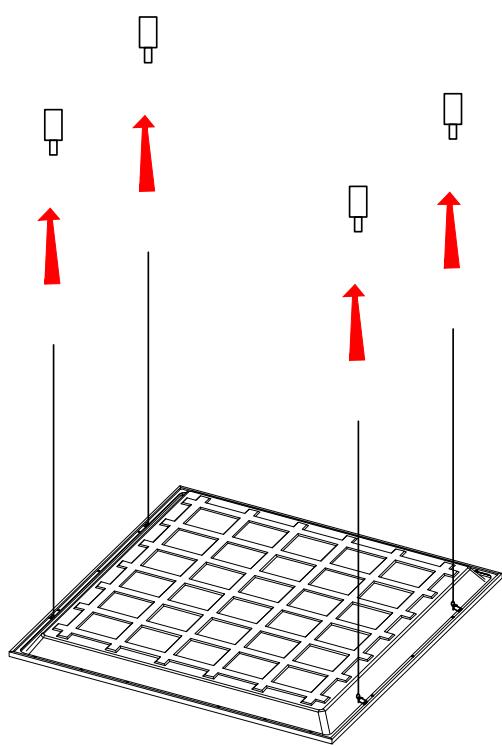

②

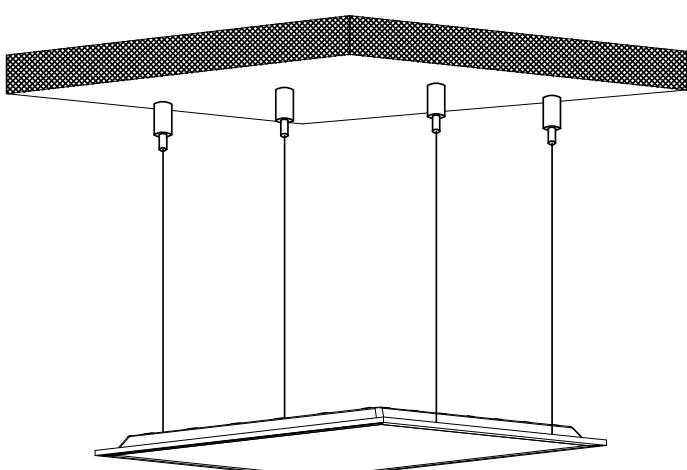

Installation:

1. This product should be installed by trained electricians.
2. Check integrality of the products when unpack the packing.
3. The distance between the light and any flammable materials must not less than 0.2m. The distance between the upper part of the installed light and the ceiling must not be less than 2cm. The light must not be installed into ceilings or walls that contain heat-insulating material. The main cable must not connect with the low voltage cable or the surface-mounted lights.
4. Guide the lights' connecting cables through the drilled-out hole, and fix the surface-mounted lights with the pre-fitted clips. Make sure that these are securely connected to the base material.
5. When laying the cables, make sure that the cables and plugs are not subjected to any tensile or twisting forces. Fit the cable tension relieving mechanisms to the connection points of the surface-mounted lights. Do not kink cables. Output cables should be laid separately and at a distance from other cables.
6. After installation, connect the transformer to the mains supply.
7. Proceed by connecting the wiring cables to the luminaries. Usually, the brown wire is the live wire, connect it with the terminal marked "L". The blue wire is the neutral wire, connect it with the terminal marked "N".
8. Use only the LED driver included, and do not connect the surface-mounted lights to other loads.
9. Do not remove the name plate of the power supply and driver of the light.

Maintenance:

1. Prior to cleaning the light, make sure it has been disconnected from the power supply.
2. Use a dry or slightly moistened cloth for cleaning.
3. Never use any chemicals or abrasives for cleaning.

Notes:

1. Please always use the light out of its package.
2. Before starting use of the light, please check if the light was damaged during transportation. If any damage shown, please DO not install or use it.
3. Any maintenance should be performed by trained professionals only.
4. Keep packaging material away from the reach of children and pets. Risk of suffocation!
5. Caution. The packaging contains small parts that may be swallowed by children.
6. Never leave children unattended in the vicinity of the lights and do not allow them to play with electrical devices.
7. Try to avoid looking directly in the LED beam-especially for extended periods of time. Do not shine the LED light in another person's eyes.
8. Never cover the lights by other objects.
9. Never allow the light to come into contact with open flames or external heat sources.
10. The products need to re-repair inspection or special treatment of retirement after service time
11. Non-professionals are not allowed to disassemble and maintain the products. We have the right not to provide after-sale service if unauthorized disassembly and maintenance happens to the products.